

Product Description: 2*8W Trimless low Square downlight
Model: 10265




IP21

Technical Data

Light source	Citizen
System wattage	16W (230mA, 36V, 2pcs)
Lumen flux	1200lm (16W, 36D,Ra.90)
Colour temperature	2700K / dimtowarm
Colour rendering index	Ra≥90
Chromaticity rate	3 MacAdam
Beam angle	36D
Service lifetime	Lens Type 50,000hrs, L70
Ingress protection	IP21 Installed
Operation voltage	220-240Vac, 50/60Hz
Operation temperature	-20~40D
Protection class	III
Finishing	White RAL9003, Black RAL9005
Construction	Aluminium
Mounting	Ceiling recessed
Warranty	5 years
Lighting control	Actec triac dim or 0-10V, Dali diming upon request

Diagram

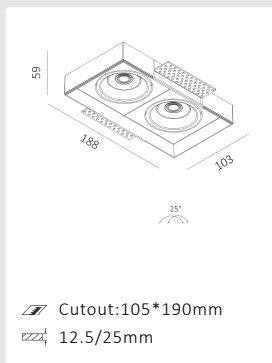

LIGHT DISTRIBUTION for 2700K

h(m)	E(lx)	Ø(m)
1	1749	Ø0.83
2	437.4	Ø1.67
3	194.4	Ø2.51
4	109.3	Ø3.35
5	69.98	Ø4.19

Photometric 2700K 36D Ra.90